



Liebert® GXT MT+CX™

1-3 kVA UPS

Compact, Efficient & Reliable
Power For Mission-Critical
Applications






Vertiv brings together hardware, software, analytics and ongoing services to ensure its customers' vital applications run continuously, perform optimally and grow with their business needs. Vertiv solves the most important challenges facing today's data centers, communication networks and commercial and industrial facilities with a portfolio of power, cooling and IT infrastructure solutions and services that extends from the cloud to the edge of the network. Headquartered in Columbus, Ohio, USA, Vertiv employs around 20,000 people and does business in more than 130 countries.

For more information, and for the latest news and content from Vertiv, visit Vertiv.com.

Vertiv

Architects of Continuity™

With a unique combination of industry expertise, technology, and resources, our mission is to support and power mission-critical technologies that drive possibility.

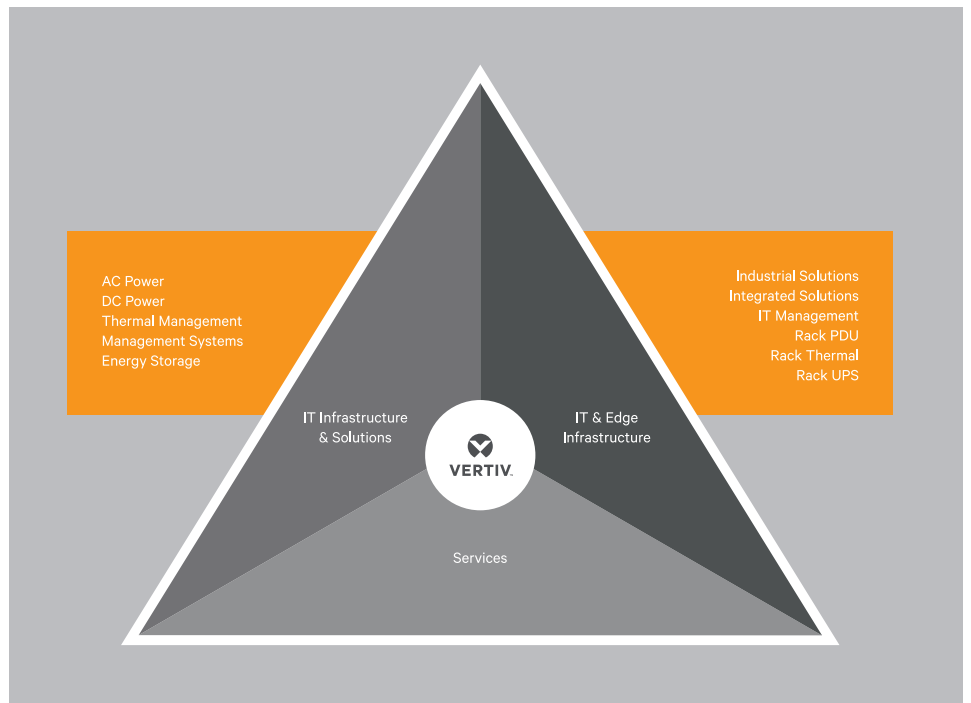

Chloride®


Our global industrial power solutions meet the most demanding technical specifications and provide safe, reliable power- no matter the challenge

Liebert®

Our global power and thermal management solutions are some of the world's most efficient and reliable power and cooling technologies

Netsure™

Our global intelligently engineered DC power systems deliver high availability, energy efficiency and scalability for converged networks

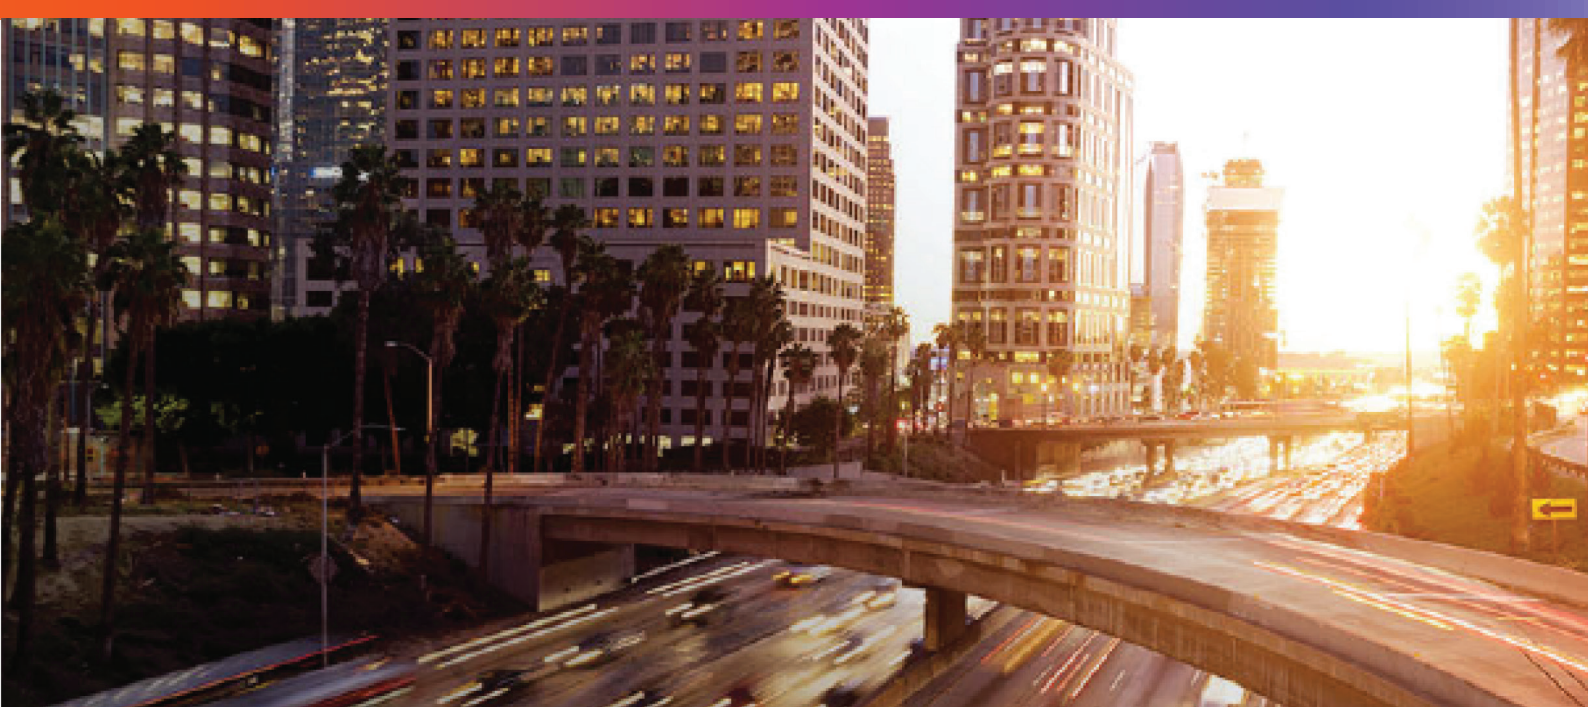

In this ever-changing dynamic world, the days of basic power protection are passé. In today's Internet-centric era, business continuity is vital and companies cannot afford downtime for their critical systems or waste time recovering the systems after a disruption. Therefore, there is a need for a power-integrated UPS, which offers flexible protection for various applications areas such as data networks, compact data center rooms, voice networks, cellular sites, process automation systems, and micro-control rooms among other edge applications.

Our solution

Liebert® GXT MT+ CX™ is a sleek, high frequency, double-conversion UPS with wide input voltage/frequency and better output voltage regulation, which makes it an ideal choice for harsh environments, especially those facing concerns related to unstable mains output and high load impact. This advanced UPS provides higher availability while offering intelligent monitoring and network management functions.

The ultimate level of engineering and dynamics that have gone beyond the development of this next-generation UPS make it a high performance system with proven reliability, giving you ultimate peace of mind.

Liebert® GXT MT+ CX™



Applications

- Data Network: Mid - range Servers (Windows and Linux), Wi-Fi Applications & Data networks
- Small Data Center Rooms
- Voice Networks: Cellular Sites, Voice Over IP (VOIP), Very small Aperture Terminals (VSAT) PBX And IT-enabled PBX Automation industries
- Process Automation Equipment: Programmable Logic Controllers (PLS) and Cash Machines (ATM)



The Liebert® GXT MT+ CX™ UPS facilitates reliable & uninterrupted power even in stringent conditions with integrated input power factor correction, low THDi, and advanced frequency regulation in a compact footprint.

Our solution

- IGBT-based Rectifier
- True on-line double-conversion efficiency (up to 90%) with DSP Control Technology for high Performance & reliability
- Active Input Power Factor Correction 0.99; 0.9 Output Power Factor
- Ultra-wide Input Voltage window: 280VAC; works well in harsh conditions and suitable for very poor quality power grid
- Generator-compatible with a wide Input Frequency range (40Hz–70Hz)
- Built-in 50/60 Hz automatic frequency converter and a configurable output voltage (200, 208, 220, 230, up to 240 Vac)

Intelligent Management Functions

- Remote Monitoring is available via the USB/RS232 ports; alternatively, dry contacts and SNMP are optional methods; supports TCP/IP with event logs and analysis function.
- Self-diagnosis and protection enable the auto shutdown of the client terminal or server under abnormal mains supply or when the battery is over discharged; Extended Run Time is facilitated through a simple process of building up additional battery resources.
- SNMP Management Card (optional) allows remote monitoring via RJ45 connection ports; allows the management of several UPS systems via the Internet; Real-time dynamic graphs of the UPS data, warning notifications via audible alarms, broadcast, mobile

Runtime Chart

Model	25%	50%	75%	100%
1kVA	24	11	6	4
2kVA	26	12	6	4
3kVA	31	13	7	4

This transformer-free UPS, with a fault-tolerant design, ensures mission-critical continuity, while providing clean and consistent power protection in unpredictable environments.

Technical Specifications (Standard Model)

Model	1K	2K	3K
Capacity	1000 VA / 900 W	2000 VA / 1800 W	3000 VA / 2700 W
Input			
Voltage Range	Low Line Transfer	180VAC/160VAC/140VAC/120VAC±5% (Ambient Temp.<35°C) (based on load percentage 100% - 80 % / 80 % - 70 % / 70 - 60 % / 60 % - 0)	
	Low Line Comeback	195VAC/175VAC/155VAC/135VAC ± 5 % (Ambient Temp.<35°C) (based on load percentage 100% - 80 % / 80 % - 70 % / 70 - 60 % / 60 % - 0)	
	High Line Transfer	300 VAC ± 5 %	
	High Line Comeback	290 VAC ± 5 %	
	Frequency Range	40Hz ~ 70 Hz	
Phase	Single phase with ground		
Power Factor	≥ 0.99 @ nominal voltage (input voltage)		
Output			
Output Voltage	208/220/230/240VAC		
Output Power Factor	0.9		
AC Voltage Regulation	±1% (Battery Mode)		
Frequency Range	47 ~ 53 Hz or 57 ~ 63 Hz (Synchronized Range)		
Frequency Range (Battery Mode)	50 Hz ± 0.5% or 60Hz ±0.5%		
Overload	Ambient Temp.<35°C 105%~110%: UPS shuts down after 10 minutes at battery mode or transfer to bypass when the utility is normal 110%~130%: UPS shuts down after 1 minute at battery mode or transfer to bypass when the utility is normal >130%:UPS shuts down after 3 seconds at battery mode or transfer to bypass when the utility is normal		
Current Crest Ratio	3:1		
Harmonic Distortion	≤ 3 % THD (linear load); ≤ 6 % THD (non-linear load)		
Transfer Time	AC Mode to Batt. Mode	Zero	
	Inverter to Bypass	4 ms (Typical)	
Waveform (Battery Mode)	Pure Sinewave		
Efficiency			
AC Mode	88%	89%	90%
Battery Mode	83%	87%	88%
Battery			
Battery Type	12 V / 9 AH		
Battery Numbers	2	4	6
Recharge Time	4 hours recover to 90% capacity (Typical)		
Charging Current	1.0 A (max.)		
Charging Voltage	27.4 VDC ± 1%	54.7 VDC ± 1%	82.1 VDC ± 1%
Physical			
Dimension, D × W × H, mm	282 × 145 × 220	397 × 145 × 220	421 × 190 × 318
Net Weight (kgs)	9.8	17	27.6
Environment			
Operation Humidity	20–90% RH @ 0–40°C (non-condensing)		
Noise Level	Less than 45dBA @ 1 Meter		
Management			
Smart RS-232 or USB	Supports Windows® 2000/2003/XP/Vista/2008/7, Linux, Unix and MAC		
Optional SNMP	Power management from SNMP manager and web browser		

* Derate capacity to 80% of capacity in Frequency converter mode or when the output voltage is adjusted to 208VAC.

**Product specifications are subject to change without further notice.

Technical Specifications (Long-run Model)

Model	1K	2K	3K				
Capacity	1000 VA / 800 W	2000 VA / 1600 W	3000 VA / 2400 W				
Input							
Voltage Range	Low Line Transfer	85VAC/75VAC/65VAC/55VAC±5% or 160VAC/140VAC/120VAC/110VAC±5% (Ambient Temp.<35°C) (based on load percentage 100%–80% / 80%–70% / 70–60% / 60%–0)					
	Low Line Comeback	95VAC/85VAC/75VAC/65VAC or 175VAC/155VAC/135VAC/125VAC ± 5% (Ambient Temp.<35°C) (based on load percentage 100%–80% / 80%–70% / 70–60% / 60%–0)					
	High Line Transfer	145 VAC ± 5% or 300 VAC ± 5%					
	High Line Comeback	140 VAC ± 5% or 290 VAC ± 5%					
	Frequency Range	40Hz ~ 70 Hz					
Phase	Single phase with ground						
Power Factor	≥ 0.99 @ nominal voltage (input voltage)						
Output Capacity							
Output voltage	100/110/115/120/127VAC or 200/208/220/230/240VAC						
AC Voltage Regulation	±1% (Batt. Mode)						
Frequency Range	47 ~ 53 Hz or 57 ~ 63 Hz (Synchronized Range)						
Frequency Range (Battery Mode)	50 Hz ± 0.25 Hz or 60 Hz ± 0.3 Hz Ambient Temp.<35°C						
Overload	105%~110%: UPS shuts down after 10 minutes at battery mode or transfer to bypass when the utility is normal 110%~130%: UPS shuts down after 1 minute at battery mode or transfer to bypass when the utility is normal >130%:UPS shuts down after 3 seconds at battery mode or transfer to bypass when the utility is normal						
Current Crest Ratio	3:1						
Harmonic Distortion	≤ 3% THD (linear load); ≤ 6% THD (non-linear load)						
Transfer Time	AC Mode to Batt. Mode	Zero					
	Inverter to Bypass	4 ms (Typical)					
Waveform (Battery Mode)	Pure Sinewave						
Efficiency							
AC Mode	88%	89%	90%				
Battery Mode	83%	87%	88%				
Battery							
Battery Numbers	2	3	4	6	8	6	8
Charging Current	1.0A/2.0A/4.0A/6.0A						
Charging Voltage	27.4 VDC ± 1%	41.0 VDC ± 1%	54.7 VDC ± 1%	82.1 VDC ± 1%	109.4 VDC ± 1%	82.1 VDC ± 1%	109.4 VDC ± 1%
Physical							
Dimension, D × W × H, mm	282 × 145 × 220				397 × 145 × 220		
Net Weight (kgs)	4.1			6.8		7.4	
Environment							
Operation Humidity	20–90% RH @ 0–40°C (non-condensing)						
Noise Level	Less than 50dBA @ 1 Meter						
Management							
Smart RS-232 or USB	Supports Windows® 2000/2003/XP/Vista/2008/7/8, Linux, Unix and MAC						
Optional SNMP	Power management from SNMP manager and web browser						

* Derate capacity to 80% of capacity in Frequency converter mode or when the output voltage is adjusted to 200VAC/208VAC or when the ambient temperature from 40°C to 50°C.
 **Product specifications are subject to change without further notice.



Vertiv.com

© 2019 Vertiv Group Corp. All rights reserved. Vertiv™ and the Vertiv logo are trademarks or registered trademarks of Vertiv Group Corp. While every precaution has been taken to ensure accuracy and completeness herein, Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.