dyson airblade V


TECHNICAL SPECIFICATION





REAR ELEVATION

SIDE ELEVATION

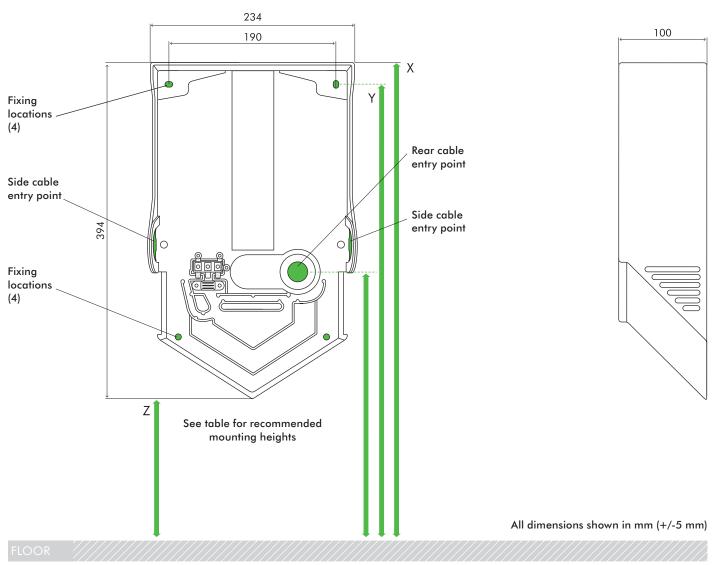

Recommended installation heights from floor						
Male	X 13	24 mm Y	1300 mm 2	Z 930 mm		
Female	X 12	89 mm Y	1265 mm 2	Z 895 mm		
Child or disabled	X 10	74 mm Y	1050 mm 2	Z 680 mm		
Child 5-8	X 95	2 mm Y	928 mm	Z 558 mm		
Child 8-11	X 10	52 mm Y	1028 mm 2	Z 658 mm		
Child 11-14	X 11:	32 mm Y	1108 mm	Z 738 mm		
Machine dimensions						
Height 394 mm Width 234 mn	n Depth 100 mm	n				

For further information please contact Dyson. Visit: www.lb.dyson.com Call: +961 1 252474

Minimum clearance

220mm clearance either side and 30mm above machine.				
Cable entry point from floor				
Male	1089 mm			
Female	1054 mm			
Child or disabled	839 mm			
Child 5-8	717 mm			
Child 8-11	817 mm			
Child 11-14	897 mm			

dyson airblade V



Electrical	_
Input voltage/Frequency: 200-240 V 50&60 Hz	
Standby power consumption: Less then 0.5 W	_
Motor specification: 1,000 W digital brushless motor	_
Heater type: None	_
Construction	
Fascia: Polycarbonate	
Antibacterial coating type: HU02 (Sprayed Nickel) contains antibacterial additive in paint. HU02 (White) contains antibacterial moulded additive. Can help prevent the growth of bacteria.	_
Back plate mounting bracket: ABS/PBT Plastic	_
Exterior screw type: Anti-tamper 4 mm Pin-Hex	_
Water ingress protection to IP24	_
Filter	
HEPA filter (Glass fibre and fleece prelayer)	-
99.9% of particles captured	
Operation	-
Touch free capacitive sensor activation	_
Hand dry time measurement: 12 seconds	
(Measurement based on NSF Protocol P.335)	_
Sound power level: 79 dB(A)	_
Sound pressure level @ 2 m: 63 dB(A) ¹	_
Operation lock-out period: 30 seconds	_
Airspeed at aperture: 690 km/h / 430 mph	_
Maximum altitude: 2,000 metres / 6,561 ft.	
Logistics	Product ra
Single unit order code: Malaysia: Sprayed Nickel 307735-01, White 307734-01 South Korea: Sprayed Nickel 307596-01, White 307595-01 Rest of world: Sprayed Nickel 307170-01, White 307169-01	Sprayed N
Unit barcode: Malaysia: Sprayed Nickel 5025155025871, White 5025155025864 South Korea: Sprayed Nickel 5025155025833, White 5025155025826 Rest of world: Sprayed Nickel 5025155025796, White 5025155025710	dyso
Net weight: 2.9 kg / 6.17 lbs	
Packaged weight: 4.0 kg / 8.81 lbs	
Packaged dimensions: (H)145 \times (W)455 \times (D)274 mm / (H)5 ³ / ₄ " \times (W)17 ⁷ / ₈ " \times (D)10 ³ / ₄ "	

Standard guarantee

5 year guarantee

¹Sound pressure measured at 2 m distance, in a semi-anechoic chamber.



ange

lickel

dyson

White



The Carbon label is a trademark of the Carbon Trust. The NSF logo is the registered trademark of NSF International. Quiet Mark is a registered trademark of the Noise Abatement Society.